



C | A | T | A | L | O | G | U | E
LED FLOOD LIGHT

FOSHAN HESHI LIGHTING CO.,LTD.
MAKE THE WORLD BRILLIANT

The price is lets the door open
The quality is keeps the door open.

C COMPANY Information

FoShan HeShi Lighting Electrical Co.,Ltd. was established in FoShan,Guangdong in 2009. We are specialize in the research,development,production and marking of high grade LED lights,and our products are widely used in hotels,home lighting and high-end commerical pccasions.FoShan HeShi Lighting Electrical Co.,Ltd has always focused on indoor LED lighting,commerical use lighting and outdoor LED lighting,such as spot lights,down lights, bulbs lights,flood lights tube lights,panel lightsand other high level products.We insist 100% original design with our own model and have applied for patents.Our company refuses copying and using market public model.Besides,we have our most standard testing equipments for all the products we produced which mostly have been certified by CE,LVD,IP, ROSH and ERP.The key component-LED light sources we use are from CREE & BRIDGELUX in USA,SHARP & NICHIA in Japan,and EPISTAR & EDISON in Taiwan.

“The price is let the door open,the quality is keep the door open”is our marketing principle. With excellent service and upper credit standing,we work hard to supply high qualithproducts. We also can design lightings according to your requirements.We can exactly supply the products you want!

For more information ,please surf our website WWW.heshilighting.en.alibaba.com.Our excellent sales and after-sales team are always at your service and will take good care of you, our valued customer. If you need any assistance, please contact us ,we will reply you within 24 hours.

Let's explore the light charming together, and let us make the world brighter!



佛山市何氏照明电器有限公司
FOSHAN HESHI LIGHTING CO.,LTD

Add: Wei Ji Industrial Park, Ren hou li Road, Ma Jiao County, Shun de district,
Foshan City, Guangdong province, China

Tel:0086-757-82589901

Web page:<http://heshilighting.com>



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-FL-HA-50W



HS-FL-HA-100W



HS-FL-HA-150W



HS-FL-HA-200W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-FL-HA-50W	50W	110V/220V	4500-5000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	167x48x206mm
HS-FL-HA-100W	100W	110V/220V	9000-10000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	206x48x265mm
HS-FL-HA-150W	150W	110V/220V	13500-15000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	276x48x346mm
HS-FL-HA-200W	200W	110V/220V	18000-20000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	276x48x346mm



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-FL-HA-50W



HS-FL-HA-100W



HS-FL-HA-150W



HS-FL-HA-200W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-FL-HA-50W	50W	110V/220V	4500-5000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	167x48x206mm
HS-FL-HA-100W	100W	110V/220V	9000-10000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	206x48x265mm
HS-FL-HA-150W	150W	110V/220V	13500-15000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	276x48x346mm
HS-FL-HA-200W	200W	110V/220V	18000-20000Lm	Ra>80	3000-6000K	50000H	120°	Aluminum	276x48x346mm




(Knuckle Mount)

(Yoke Mount)

(Trunnion Mount)

(Slip Fitter Mount)

Yoke Mount	L*W*H (mm)	Trunnion Mount	L*W*H (mm)
50W	221*60*214mm	100W	286*71*295mm
100W	286*71*265mm	150W	331*75*321mm
150W	331*75*296mm	200W	386*78*360mm
200W	386*78*339mm		
Slip Fitter Mount	L*W*H (mm)	Knuckle Mount	L*W*H (mm)
150W	331*75*387mm	50W	221*60*233mm
200W	286*78*428mm	100W	286*71*278mm

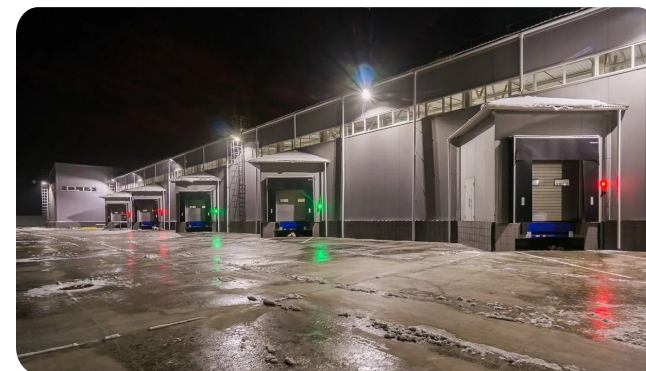

Characteristic:

- High efficacy: 140Lm/W
- IP65 waterproof
- Operating temperature: -10℃~60℃
- Knuckle mount/Yoke mount/Trunnion mount /Slip fitter mount optional
- Corrsion resistant cold forged aluminum construction
- 5 years warranty

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material
HS-CH-50W	50W	100~277V	7000Lm	Ra>80	3000-6500K	50000H	120°	Aluminum
HS-CH-100W	100W	100~277V	14000Lm	Ra>80	3000-6500K	50000H	120°	Aluminum
HS-CH-150W	150W	100~277V	21000Lm	Ra>80	3000-6500K	50000H	120°	Aluminum
HS-CH-200W	200W	100~277V	28000Lm	Ra>80	3000-6500K	50000H	120°	Aluminum



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-BK-10W



HS-BK-30W



HS-BK-50W



HS-BK-100W



HS-BK-200W



HS-BK-300W



HS-BK-400W




HS-BK-500W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-BK-10W	10W	110V/220V	800lm	Ra>80	2700-6500K	50000H	120°	Aluminum	103x83x18
HS-BK-30W	30W	110V/220V	2500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	159x121x25
HS-BK-50W	50W	110V/220V	4200lm	Ra>80	2700-6500K	50000H	120°	Aluminum	203x159x29
HS-BK-100W	100W	110V/220V	8500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	269x209x31
HS-BK-200W	200W	110V/220V	17000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	380x280x44
HS-BK-300W	300W	110V/220V	25000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	460x340x44
HS-BK-400W	400W	110V/220V	33500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	500x400x44
HS-BK-500W	500W	110V/220V	42000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	500x400x44



Characteristic:

- RGB
- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-BK-30W



HS-BK-50W



HS-BK-100W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-BK-30W	30W	110V/220V	2500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	159x121x25
HS-BK-50W	50W	110V/220V	4200lm	Ra>80	2700-6500K	50000H	120°	Aluminum	203x159x29
HS-BK-100W	100W	110V/220V	8500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	269x209x31



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-BK-30W



HS-BK-50W



HS-BK-100W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-BK-30W	30W	110V/220V	2500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	160x28x180
HS-BK-50W	50W	110V/220V	4200lm	Ra>80	2700-6500K	50000H	120°	Aluminum	205x28x200
HS-BK-100W	100W	110V/220V	8500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	270x28x250



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-HR-50W



HS-HR-100W



HS-HR-150W



HS-HR-200W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-HR-50W	50W	110V/220V	2500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	160x28x180
HS-HR-100W	100W	110V/220V	4200lm	Ra>80	2700-6500K	50000H	120°	Aluminum	205x28x200
HS-HR-150W	150W	110V/220V	8500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	270x28x250
HS-HR-200W	200W	110V/220V	8500lm	Ra>80	2700-6500K	50000H	120°	Aluminum	270x28x250



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-HX-50W



HS-HX-100W



HS-HX-150W



HS-HX-200W



HS-HX-300W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-HX-50W	50W	AC220-240V	4000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	185x210x35
HS-HX-100W	100W	AC220-240V	8000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	225*260*35
HS-HX-150W	150W	AC220-240V	12000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	260*305*40
HS-HX-200W	200W	AC220-240V	16000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	300*350*40
HS-HX-300W	300W	AC220-240V	24000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	370*395*40



Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-HM-50W



HS-HM-100W



HS-HM-150W



HS-HM-200W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-HM-50W	50W	AC220-240V	4000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	220*180*38
HS-HM-100W	100W	AC220-240V	8000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	255*255*38
HS-HM-150W	150W	AC220-240V	12000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	320*262*38
HS-HM-200W	200W	AC220-240V	16000lm	Ra>80	2700-6500K	50000H	120°	Aluminum	412*262*38

Characteristic:

- Multifunctional intelligence
- 2.4G RGB+CCT
- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- 3 years warranty



HS-HK-10W



HS-HK-20W




HS-HK-30W



HS-HK-50W



HS-HK-100W

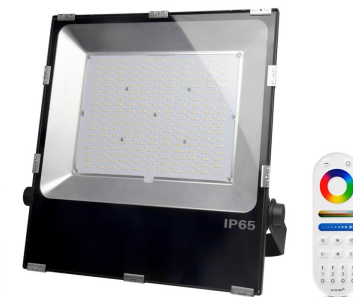


HS-HK-200W


Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-HK-10W	10W	110V/220V	85lm/w	Ra>80	2700-6500K	50000H	120°	Aluminum	166*107*32
HS-HK-20W	20W	110V/220V	85lm/w	Ra>80	2700-6500K	50000H	120°	Aluminum	217*152*40
HS-HK-30W	30W	110V/220V	85lm/w	Ra>80	2700-6500K	50000H	120°	Aluminum	227*167*40
HS-HK-50W	50W	110V/220V	85lm/w	Ra>80	2700-6500K	50000H	120°	Aluminum	227*167*40
HS-HK-100W	100W	110V/220V	85lm/w	Ra>80	2700-6500K	50000H	120°	Aluminum	403*295*54
HS-HK-200W	200W	110V/220V	85lm/w	Ra>80	2700-6500K	50000H	120°	Aluminum	403*295*54

Characteristic:

- High luminous efficiency
- Waterproof & IP65
- Wide beam angle
- Rotatable bracket
- Thick heat sink
- 5 years warranty
- Maintenance free & long lifespan

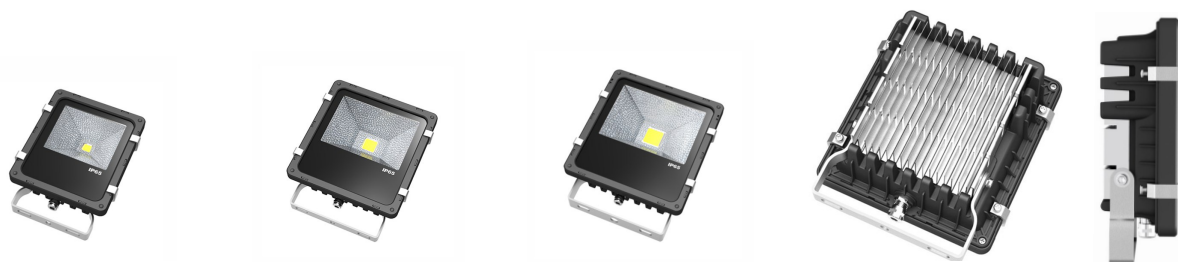

HS-003-FL-10W HS-003-FL-20W HS-003-FL-30W

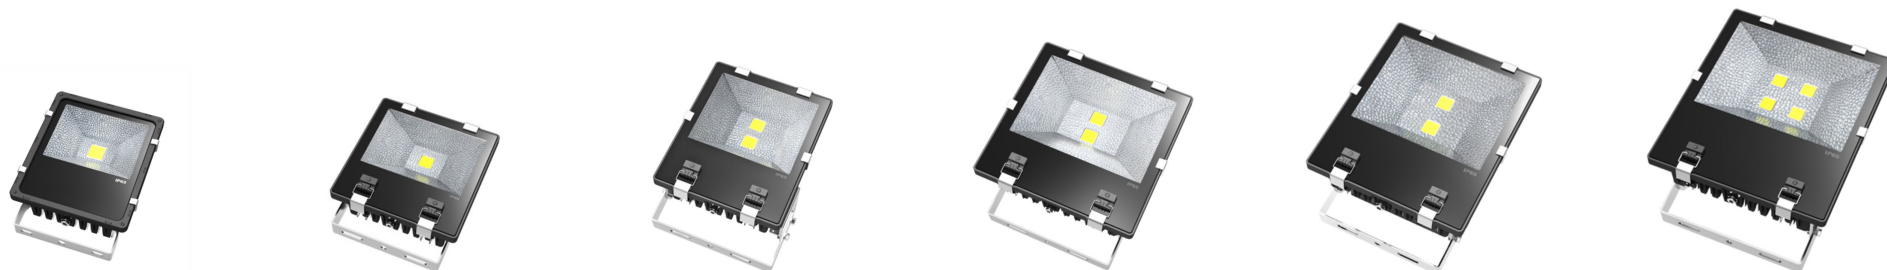


HS-003-FL-50W HS-003-FL-70W HS-003-FL-100W HS-003-FL-120W HS-003-FL-150W HS-003-FL-200W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-FL-003-10W	10W	85-265V	1000lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	180x155x40
HS-FL-003-20W	20W	85-265V	2000lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	227x190x40
HS-FL-003-30W	30W	85-265V	3000lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	268x310x45
HS-FL-003-50W	50W	85-265V	5500lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	378x310x48
HS-FL-003-70W	70W	85-265V	7300lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	444x333x50
HS-FL-003-100W	100W	85-265V	10500lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	180x155x40
HS-FL-003-120W	120W	85-265V	12500lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	227x190x40
HS-FL-003-150W	150W	85-265V	15800lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	268x310x45
HS-FL-003-200W	200W	85-265V	21000lm	Ra>80	2700-6500K	50000H	60° 90°	Aluminum	378x310x48

Characteristic:

- Super bright
- Energy saving & long life
- Waterproof & widely used
- Stable & easy installation
- Super slim & save the freight
- Frosted glass, excellent uniform lighting results
- 3 years warranty

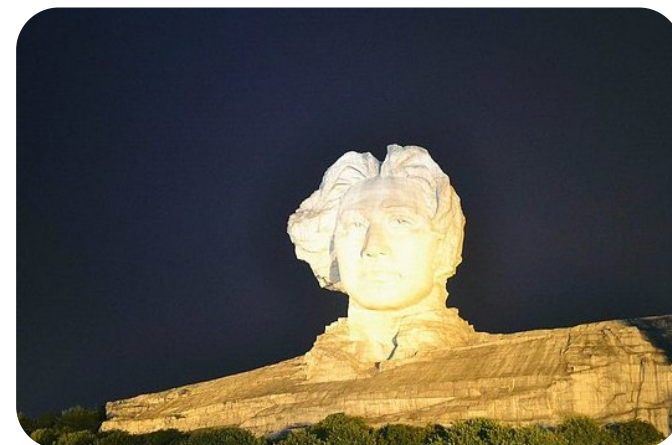

HS-AK-20W



HS-AK-30W



HS-AK-50W



HS-AK-70W



HS-AK-150W



HS-AK-200W

Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-AK-20W	20W	110/220V	1600lm	Ra>80	2700-6500K	50000H	60° 120°	Aluminum	108x91x22
HS-AK-30W	30W	110/220V	2400lm	Ra>80	2700-6500K	50000H	60° 120°	Aluminum	135x114x27
HS-AK-50W	50W	110/220V	4000lm	Ra>80	2700-6500K	50000H	60° 120°	Aluminum	196x149x27
HS-AK-70W	70W	110/220V	5600lm	Ra>80	2700-6500K	50000H	60° 120°	Aluminum	211x159x27
HS-AK-100W	100W	110/220V	8000lm	Ra>80	2700-6500K	50000H	60° 120°	Aluminum	271x207x31
HS-AK-150W	150W	110/220V	12000lm	Ra>80	2700-6500K	50000H	60° 120°	Aluminum	310x235x35
HS-AK-200W	200W	110/220V	16000lm	Ra>80	2700-6500K	20000H	60° 120°	Aluminum	372x282x41

Characteristic:

- High luminous efficiency
- Waterproof & IP66
- Wide beam angle
- Rotatable bracket
- 5 years warranty
- Maintenance free & long lifespan



Model Number	Wattage	Voltage	Luminous Flux	CRI	CCT	Life Span	Angle	Body material	Size(mm)
HS-FL-004-10W	10W	85-265V	900-1000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	126x40x125
HS-FL-004-20W	20W	85-265V	2700-3000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	165x40x139.5
HS-FL-004-30W	30W	85-265V	2700-3000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	180x40x154.4
HS-FL-004-50W	50W	85-265V	4500-5000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	227x40x190
HS-FL-004-100W	100W	85-265V	9000-10000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	268x44.5x310
HS-FL-004-150W	150W	85-265V	13500-15000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	378x47.5x310
HS-FL-004-200W	200W	85-265V	18000-20000lm	Ra>90	2700-6500K	50000H	60° 120°	Aluminum	444x50x333



MAKE THE WORLD BRILLIANT

 **HeShi** 佛山市何氏照明电器有限公司
FOSHAN HESHI LIGHTING ELECTRIC CO.,LTD

地址：佛山市禅城区张槎镇华宝南路基德福工业园9座东面4楼
Add : 4th Fr East of 9 Building JIDEFU Industrial Park, Huabao South Rd,
Zhangcha, Chancheng District Foshan City,Guagndong Province,China

电话 (TEL) : +86-757-82589901 +86 13928643337

网址 (WEB) : www.heshilighting.com
邮箱 (Email) : sales1@heshilighting.com sales5@heshilighting.com